


ЦИФРОВОЙ КОМБИНИРОВАННЫЙ РЕСИВЕР ADTV+T2+C



Model	ADTV+T\T2+C
Hardware	
CPU	Amlogic S905W Quad core ARM Cortex-A53 CPU up to 1.5GHz (DVFS)
GPU	Penta-core ARM Mali-450 GPU up to 750MHz+ (DFS)
Processing	Supports HDR10 and HLG HDR processing
RAM	DDRIII 1GB (Optional 2GB)
EMMC Flash	EMMC Flash 8GB (Optional 4GB,8GB,16GB,32GB)
WiFi	802.11 b/g/n
Bluetooth	NO (Bluetooth 4.0Optional)
HDMI	With CEC, HDR and HDCP 2.2, 4Kx2K@30fps max
SD Card (TF)	SD cards (up to 32GB)*1
USB HOST	2High speed USB 2.0,support USB DISK and USB HDD*4
1*RJ45	Ethernet:10/100M, standard RJ-45*1
SPDIF	SPDIF output*1
AV	AV CVBS AR AL output
IR	IR Infra Remote control
LED Indicator	Red LED Standby,Blue LED Run
DVB-T/T2 Demodulation	
DVB-T/T2	DVB_T2 System standard :ETSIEN 302 755
	Support MPLP
	Demodulation: QPSK,16QAM,64QAM or 256QAM
	Forward error correction rate 1/2,2/3,3/4.3/5,5/6
	Guard interval:1/4,19/256;1/8,19/128;1/16,1/32,1/128
	Bandwith 6/7/8MHz
	Input Frange range:54--860MHz Input Impedance:75
	Input Signal lvl: -84 dBm to 0 dBm(average power)

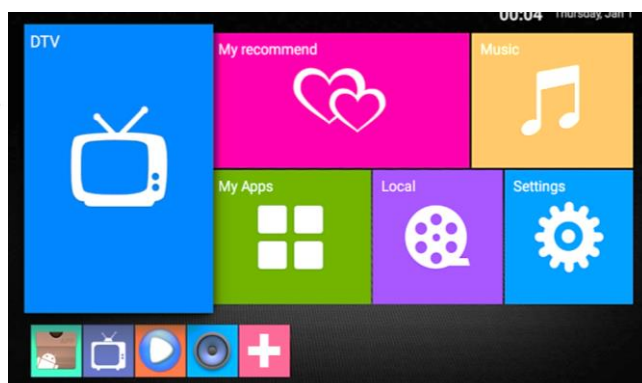

DVB-C	Receiving Frequency : VHF174~230MHz/UHF 470~862MHz			
	Waveform : CDFDM			
	Bandwith: 6/7/8MHz			
	Demodulation:QPSK,16QAM,64QAM			
	Guard Modes Interval :1/32,1/16,1/8,1/4			
Mode : 2K/8K				
Operating System	Android 7.1 OS			
Video Decoding	<ul style="list-style-type: none"> o VP9 Profile-2 up to 4Kx2K@30fps o H.265 HEVC MP-10@L5.1 up to 4Kx2K@30fps o H.264 AVC HP@L5.1 up to 4Kx2K@30fps o H.264 MVC up to 1080P @60fps o MPEG-4 ASP@L5 up to 1080P@60fps (ISO-14496) o WMV/VC-1 SP/MP/AP up to 1080P@60fps o AVS-P16(AVS+) /AVS-P2 JiZhun Profile up to 1080P@60fps o MPEG-2 MP/HL up to 1080P@60fps (ISO-13818) o MPEG-1 MP/HL up to 1080P@60fps (ISO-11172) o RealVideo 8/9/10 up to 1080P@60fps 			
Audio Decoding	<p>Low power MediaCPU with DSP audio processing Supports MP3,AAC,WMA,RM,FLAC,Ogg and programmable with 7.1/5.1 down-mixing Built-in stereo audio DAC Built-in SPDIF/IEC958 and PCM serial digital audio input/output Supports concurrent dual audio stereo channel output with combination of analog+PCMo or I2S+PCM</p>			
Picture	JPEG,PNG,BMP,GIF,JPG			
Language	Chinese , English ,Germany ,Japanese, Korea etc. 24 languages			
KODI	Support KODI 17.1			
Remote	Support Infra Remote control			
Appliactions				
Online	Browse all video websites ,support Netflix ,Hulu ,Flixster , youtube etc			
Apps	Apps download freely form android market ,amazon appstore etc			
Medium	Local Media playback,support HDD, U disck ,SD card			
Talk online	Support SKYPE video call ,MSN , facebook ,twitter ,QQ etc			
Others	Support wifi hotpiont ,could be as a wireless router			
	Support DLNA, AirPlay, Google TV Remote etc			
Accessories				
Accessories	gift box			
	HDMI cable			
	IR remote control			
	Power charger adapter 5V/2A			
	User Manual			
Loading				
Loading	machine size	118*118*25 mm	Color Box Dimension	240*150*60mm
	machine weight	380g	Color Box Dimension	400g
	Carton Dimension	57.2*41*27 cm	G.W./CTN 40PCS	16KG



